



FR4003

Field Receiver

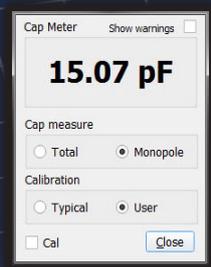

Start auto calibration					
Receiver (ADC)			Front End (BNC)		
Frequency (MHz)	Att.0 Voltmeter high Z (dB)	Att.0 Antenna (dB)	Att.10 Voltmeter high Z (dB)	Att.10 Antenna (dB)	
1	0.009	2.68	-6.52	2.90	-6.52
2	0.01	2.70	-6.31	2.92	-6.31
3	0.02	2.69	-5.57	2.90	-5.57
4	0.05	2.69	-5.33	2.89	-5.33
5	0.08	2.71	-5.27	2.92	-5.27
6	0.1	2.71	-5.25	2.92	-5.25
7	0.15	2.72	-5.24	2.92	-5.24
8	0.2	2.70	-5.24	2.91	-5.24
9	0.5	2.70	-5.22	2.89	-5.22
10	0.8	2.69	-5.20	2.87	-5.20

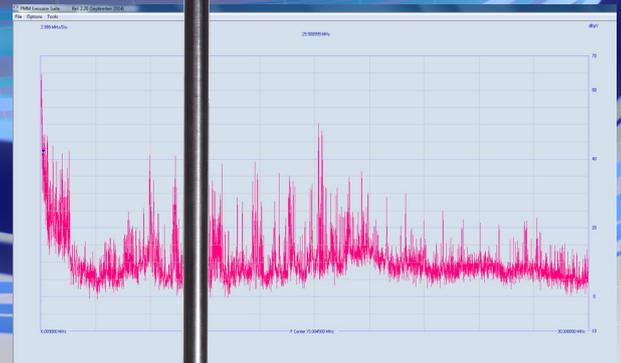

Main Features

- 9 kHz to 30 MHz frequency range
- Antenna CISPR 12, CISPR 16, CISPR 25, MIL-STD, DO-160 fully compliant
- Internal full CISPR 16-1-1 receiver
- Operates both swept and gapless FFT modes
- Very fast measuring time
- Embedded attenuator, preamplifier and preselectors
- Fiber optic serial link to 9010F series or directly to PC
- Grounding effectiveness auto-diagnostic capability
- On-board tracking generator and antenna CISPR adapter
- Automatic diagnostic and calibration
- Scattering free
- PC software
- RF front-end output
- On-board capacitance meter
- Plug-in rechargeable Li-ion battery



The FR4003 is the new gold standard in measuring electric fields up to 30 MHz. Thanks to its innovative approach it replaces traditional rod antennas and adds several benefits. It fully meets all MIL-STD and CISPR specifications for rod antennas and is also a fully-compliant CISPR 16-1-1 receiver with a fiber optic link that allows it to work as a stand-alone device (when connected to a PC) or in tandem with a PMM receiver. It fully meets all the standards in both swept and FFT mode, as selected by the user.

It is possible to switch the analog signal from the internal receiver to the analog output and connect it to any standard receiver by traditional coaxial cable, although this is not recommended due to scattering and other drawbacks typical of rod antennas.

The internal receiver structure features preselectors, attenuators and preamplifiers fully controlled either by the internal firmware or manually by the operator. Hence, a test set-up requires no additional receiver. An internal tracking generator allows a self-calibration procedure to guarantee optimum performance and accurate measurements. This tracking generator is part of an internal capacitance meter that is crucial not only for self-calibration, but also for verifying the grounding effectiveness of the antenna. The FR4003 can even become a field generator. In this case the antenna broadcasts the signal produced by the internal signal generator and can therefore be used to characterize environments or other receiving set-ups.

Standard PEMS controlling software is included with the FR4003. Thanks to its rechargeable and easily replaceable Li-ion battery, the FR4003 can work for several hours on its own and therefore with an unperturbed field.

FR4003

Field Receiver

SPECIFICATIONS

Frequency range	9 kHz to 30 MHz	
Resolution	1 Hz	
Frequency accuracy	< 1 ppm	
RF Input	High impedance N fem.	
Attenuator	Built-in 0 dB to 30 dB (10 dB steps)	
HPF	Built-in 9 kHz or 150 kHz HPF (selectable)	
Preamplifier	Built-in 20 dB gain (selectable)	
Max input level	BNC analog output (1 dB compression point @ 1MHz) (SD spectral density)	Internally processed signal (SD spectral density with preselector ON)
100/104 cm rod (preamp OFF, Att 30 dB)	380 V/m CW 137 dB μ V/m/MHz SD	38 V/m CW 128 dB μ V/m/MHz SD
N input (50 Ω term., preamp OFF, Att 10 dB)	137 dB μ V CW 103 dB μ V/MHz SD	117 dB μ V CW 94 dB μ V/MHz SD
Damage level	500 V/m CW (Min. Att. 20 dB)	
Noise level	100/104 cm rod	N input (50 Ω term.)
Preamp ON, Att 0 dB, 10 kHz RBW	13 dB μ V/m PK 2 dB μ V/m AVG	-1 dB μ V PK -12 dB μ V AVG
Manual mode, tune 1 MHz	DANL -38 dB μ V/m(Hz)	DANL -52 dB μ V(Hz)
Spurious response	< -10 dB μ V (Att 0 dB, 50 Ω termination, AVG, hold time 10 ms, RBW auto)	
Measurement accuracy	9 kHz to 30 MHz \pm 0.8 dB	
Preselector	Two bandpass filters: 9 kHz to 30 MHz 150 kHz to 30 MHz	
	Five bandpass filters: 9 kHz to 5.67 MHz 5.67 MHz to 11.19 MHz 11.19 MHz to 16.71 MHz 16.71 MHz to 22.23 MHz 22.23 MHz to 30 MHz	
Internal receiver	Fully digital. Operates both standalone and in conjunction with PMM 9010F receiver	
IF bandwidth	3, 10, 30, 100, 300 kHz	
6 dB bandwidth	200 Hz, 9 kHz (CISPR 16-1-1) 1, 10 kHz (MIL-STD-461)	
Level measuring time	CISPR 16-1-1 as default	
(Hold time)	0.2 ms to 120 s	
Detectors	Peak, Quasi-Peak, Average, RMS, RMS-Average (Optional), C-Average Smart Detector function	
Sweep time	FFT mode	Swept mode
9 kHz to 150 kHz (RBW 200 Hz CISPR)	Analyzer hold time lowest Receiver hold time 1s	Analyzer hold time lowest Receiver hold time 1s
10 kHz to 150 kHz (RBW 1 kHz MIL)	1.1s 7s	110s 1600s
150 kHz to 30 MHz (RBW 9 kHz CISPR)	0.4s 4s	6s 595s
150 kHz to 30 MHz (RBW 10 kHz MIL)	2.8s 22s	23s 6200s
	2.8s 22s	46s 12400s
Antenna Factor	At BNC auxiliary analog output 0 dB/m (Att 0 dB preamp ON)	
Analog output	50 Ω BNC fem.	
Internal generator	Tracking & CW generator (for auto-calibration, capacitance meter and field source)	
Frequency range	9 kHz to 30 MHz	
Frequency resolution	1 Hz	
Level range	65 to 95 dB μ V	
Level resolution	1 dB	
Level accuracy	0.3 dB	
Internal capacitance meter	Range 0 to 100 pF	
Resolution	0.01 pF	
Calibration	Automatic (calibration fixtures included)	
Auto test	Automatic at power on	
Auto calibration	Through internal generator and matching network	
Fiber optic connection	RP-02 series serial optical interface 115 kbaud 9010F series high speed optical interface	
PC software	PMM Emission Suite – PMM FR4003 Utility	
Display units	dBm, dB μ V, dB μ A, dB μ W, dB μ V/m, dB μ A/m, dBpT	
With PMM Emission Suite SW	80 to 200 dB selectable dynamic range	
Standard compliance	CISPR 16-1-1, MIL-STD-461G fully compliant on-board receiver. CISPR 12, CISPR 25, MIL-STD-461G, DO-160 fully compliant rod antenna	
FW updating	Through USB optical link	
Power supply	7.4 V – 7.8 Ah Li-ion rechargeable & interchangeable battery (8h avg. operating time, 4h avg. charging time); 100 – 240 Vac / 50 – 60 Hz to 12 Vdc – 2.5 A universal adapter/charger	
Operating temperature	-10 °C to 60 °C	
Storage temperature	-30 °C to 75 °C	
Operating humidity	0 to 98% (without condensation)	
Tripod support	Threaded insert UNC 1/4"	
Dimensions and weights (Overall W x H x D)		
Receiver	134 x 84 x 285 mm	2,40 kg
Counterpoise	600 x 1,5 x 600 mm	4,15 kg
Rod (\varnothing 20 x 1000 mm)	\varnothing 29 x 1020 mm	0,50 kg
Rod extension (40 mm)	\varnothing 20 x 47 mm	0,05 kg
TOTAL (w rod ext.)	600 x 1122 x 600 mm	7,10 kg



Ordering information:

FR4003 Field Receiver
Includes: 50 ohm to rod capacitance fixture for CISPR calibration, 15 pF fixture for capacitance meter calibration, MIL-STD 40 mm rod extension, 600x600 mm counterpoise, battery pack, AC adapter/charger, PC software, 10 m plastic fiber optic for PC, USB-fiber optic adapter, certificate of calibration, user's manual.

Optional accessories:

BP-02 Li-ion battery pack
9010/FO-20 High speed fiber optic cable (20 m)
9010/FO-50 High speed fiber optic cable (50 m)
9010/FO-100 High speed fiber optic cable (100 m)
9010/RAV RMS-Avg detector
Plastic fiber optic for PC (10 m)
Plastic fiber optic for PC (20 m)
Plastic fiber optic for PC (40 m)
USB-fiber optic adapter
TR-01A set
Includes: TR01 60-180 cm wooden column extendable tripod, column strengthener, soft carrying case

Related products

Receivers

- 7010/01: EMI Receiver 9 kHz to 1 GHz
- 7010/02: EMI Receiver 9 kHz to 30 MHz
- 7010/03: EMI Receiver 9 kHz to 3 GHz
- ER8000/00 EMI Receiver 9 kHz to 30 MHz
- ER8000/01 EMI Receiver 9 kHz to 3 GHz
- ER9000/00 EMI Receiver 10 Hz to 30 MHz
- ER9000/01 EMI Receiver 10 Hz to 3 GHz
- 9010F: EMI Receiver 10 Hz to 30 MHz
- 9010/03P: EMI Receiver 10 Hz to 300 MHz
- 9010/30P: EMI Receiver 10 Hz to 3 GHz
- 9010/60P: EMI Receiver 10 Hz to 6 GHz
- 9030: EMI Receiver 30 MHz to 3 GHz
- 9060: EMI Receiver 30 MHz to 6 GHz
- 9180: EMI Receiver 6 GHz to 18 GHz

Antennas

- BC-01: Biconical Antenna 30 to 200 MHz
- BL-01: Biconical Log Periodic Antenna 30 MHz to 6 GHz
- DR-01: Double-ridged horn Antenna 6 to 18 GHz
- LP-02: Log Periodic Antenna 200 MHz to 3 GHz
- LP-03: Log Periodic Antenna 800 MHz to 6 GHz
- LP-04: Log Periodic Antenna 200 MHz to 6 GHz
- VDH-01: Van der Hoofden Test Head 20 kHz to 10 MHz
- TR-01: Antenna Tripod
- Antenna Set AS-02 / AS-03 / AS-04 / AS-05 / AS-06 / AS-07 / AS-08
- RA-01: Rod Antenna 9 kHz to 30 MHz
- RA-01-HV: Rod Antenna 150 kHz to 30 MHz
- RA-01-MIL: Rod Antenna 9 kHz to 30 MHz

LISNs/Probes

- L2-16B: single phase AMN, 16 A
- L3-32: 4 lines, 3-phase AMN, 32 A
- L3-64: 4 lines, 3-phase AMN, 63 A
- L3-64/690V: 4 lines, 3-phase AMN, 63 A
- L3-100: 4 lines, 3-phase AMN, 100 A
- L1-150M: single-path, 50 Ohm AMN, 150 A
- L1-150M1: single-path, 50 Ohm AMN, 150 A
- L1-500: single phase AMN, 500 A
- L3-500: 4 lines, 3-phase AMN, 500 A
- SBRF4: RF Switching Box
- SHC-1/1000: Voltage probe, 1000 Vac, 35 dB
- SHC-2/1000: Voltage probe, 1000 Vac, 30 dB

Sales:
Via Rimini, 22
20142 Milano - ITALY
Phone: +39 02 5818811
Fax: +39 02 58188273



L3HARRIS

narda
Safety Test Solutions

E-Mail: nardait.support@L3Harris.com
Internet: www.narda-sts.it

Headquarters:
Via Benessea, 29/B
17035 Cisano sul Neva (SV) - ITALY
Phone: +39 0182 58641
Fax: +39 0182 586400